




DA101010-05: 10 MHz Distribution Amplifier

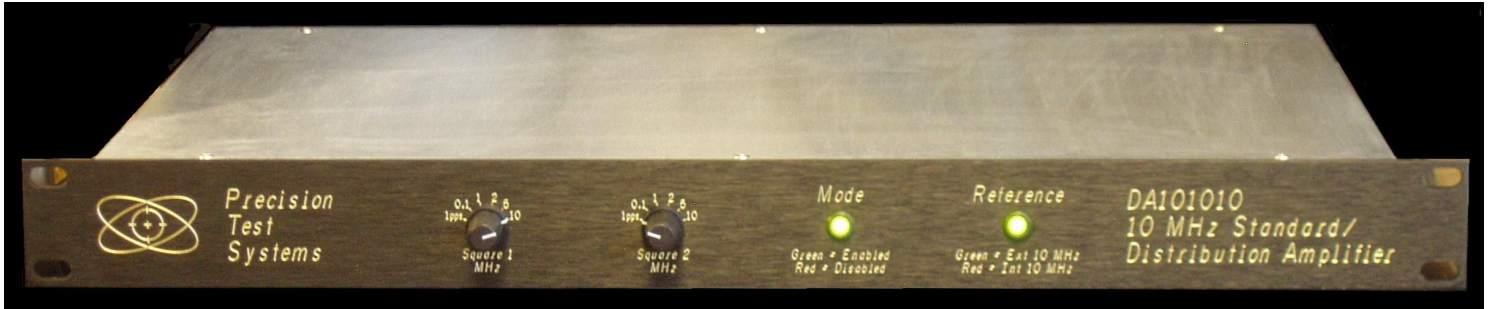

Key Features

- 10 MHz Main Input
- AGC Level Controlled
- 10 sinewave outputs plus a slave
- 2 squarewave outputs
- High channel isolation
- Low Phase Noise
- Optional second 10 MHz back-up input
- Optional internal 10 MHz back-up oscillator
- Above two options automatically switched in
- Optional Alarm Relay, enabled on alarm condition
- Optional Redundancy (two units with automatic switchover)
- Available in other frequencies from 1 to 100 MHz.

General Description

The DA101010-05 can be used to synchronize up to seven instruments (five sinewave, one squarewave and one slave output) to a frequency reference input. The reference input frequency is 10 MHz and the output frequency is exactly the same as the input. The DA101010-05 incorporates AGC (automatic gain control) so that a 10 MHz input can be varied from -10 dBm to +20 dBm without the outputs changing by more than 0.4 dB. AGC also removes any unwanted AM that may be on the input signal. Inputs as low as -30 dBm still produce a useable output. The pure sinewave output (harmonics are typically 70 dB down) enables the DA101010-05 to work in the most demanding applications.

Outputs

There are five 10 MHz, sinewave outputs. Each 10 MHz output is isolated from the input and each other. Therefore the reference oscillator connected to the DA101010-05 input is protected against load variations, short circuits etc. that may be applied to the outputs. An additional squarewave outputs can be switched in frequency from 10 MHz, 5 MHz, 2 MHz, 1 MHz, 100 kHz and 1 pps. This output are ideal for instruments that do not use a 10 MHz timebase. A rear slave output can be connected to a second DA101010-05 (or more) to give additional outputs. See "Applications" below.

There is also a logic alarm output. This alarm signal will show when a valid input signal is present.

Applications

The DA101010-05 10 MHz Distribution Amplifier is ideal for use in calibration or standard laboratories, radio repair workshops or production facilities. By using the rear slave output, many DA101010-05's can be connected together to give multiple outputs. Over 1000 outputs can be derived from one reference input.

Miscellaneous Information

The DA101010-05 is a highly reliable unit with an MTBF of over 60 years. The DA101010-05 is housed in a fully screened 19" rack mount case and operates from a 100 - 240 VAC supply (usable 90 – 260 VAC) or external 12 V DC. The DA101010-05 is CE marked for sale within the EEC.

Options

Various options for the DA101010-05 are shown below. Note that not all options can be fitted at the same time. Consult Precision Test Systems for more details.

The DA series can be modified upon special request to work at different frequencies than 10 MHz. For example the DA151510 accepts a 15 MHz input and has 15 MHz outputs. Other frequencies to 100 MHz can also be accommodated.

The DA101010 is similar to this unit but has an additional five sinewave outputs and one squarewave output.

Option 01 is an Alarm Relay that is activated when the 10 MHz input signal is present. Two changeover relay contacts can be used to raise an alarm should the input signal or power be lost. A logic alarm output is provided as standard.

Option 02 is a redundancy option allowing two DA101010-05's to be operated together giving a fully redundant output. If one unit fails, the outputs will be sourced from the second unit. The option includes a second DA101010-05.

Option 03 is an internal 10 MHz back up oscillator. Should the input 10 MHz fail, the internal oscillator switches in.

Option 04 converts the outputs to 5 MHz. So with a 10 MHz input, there are five outputs at 5 MHz. The squarewave outputs remain switchable from 10, 5, 2, 1, 0.1 MHz and 1 pps.

Option 05 deletes five outputs and one squarewave output. So this is a negative option that reduces the price.

Option 06 adds a second 10 MHz "back-up" input. Normally the first input is used as the reference for all the outputs. If this first input fails, the second "back-up" input is automatically switched in and used as the reference.

Other models in the series include:

DA050510	5 MHz input with 10 x 5 MHz outputs and 2 x squarewave outputs
DA051010:	5 MHz input with 10 x 10 MHz outputs and 2 x squarewave outputs
DA050530:	5 MHz input with 25 x 5 MHz sinewave outputs and 5 x squarewave outputs
DA051030:	5 MHz input with 25 x 10 MHz sinewave outputs and 5 x squarewave outputs
DA051530:	5 MHz input with 25 x 15 MHz outputs and 5 x squarewave outputs
DA101010:	10 MHz input with 10 x 10 MHz outputs and 2 x squarewave outputs
DA100510:	10 MHz input with 10 x 5 MHz outputs and 2 x squarewave outputs
DA101030:	10 MHz input with 25 x 10 MHz sinewave outputs and 5 x squarewave outputs
DA100530:	10 MHz input with 25 x 5 MHz sinewave outputs and 5 x squarewave outputs
DA101530:	10 MHz input with 25 x 15 MHz outputs and 5 x squarewave outputs
DA1-100-10	1 MHz to 100 MHz wideband input. Up to 15 outputs, same frequency as the input

Special Modification

The DA101010-05 can be modified to customer's specific requirements. If the customer requires a feature not already mentioned in this brochure, then the customer should consult Precision Test Systems to see whether that feature can be added for a nominal charge. Many of the existing options started out as customers specific requests. These "specials" have now become standard options.

Specification

Specifications for the DA101010-05 are shown on the next page.

DA101010-05 SPECIFICATIONS

Specification Parameter	Specification	Comments
Input		
Frequency	10.000000 MHz	50 Ω BNC Connector on rear panel
Bandwidth (-3 dB)	250 kHz	
Input Impedance / VSWR	50 Ω / < 1.15 @ 10 MHz	< 1.30 @ 10 MHz for option 03
Input Level	+20 dBm to -10 dBm	Output Changes by < 0.4 dB
Sinewave Outputs (5)		
Output Waveform	Sinewave	50 Ω BNC Connector on rear panel
Number of Outputs	Five	An option for ten outputs is available
Output Frequency	Exactly the same as the input frequency	Subject to the DA101010-05's jitter spec
Output VSWR	< 1.5: 1 @ 10 MHz	
Output level	Adjustable from 0 dBm to > +13 dBm Factory default setting is +10 dBm	Each output is user adjustable.
Harmonic Distortion at 10 MHz	-65 dBc (typically -70 dBc)	Output set to +10 dBm
Jitter (1 second, Allan Variance)	< 2 ps rms	
Channel to channel isolation	> 40 dB	Typical 45 dB to 60 dB
Input to Output Isolation	> 85 dB	Typical 86 dB to 105 dB
Squarewave Outputs (1)		
Output Waveform	Squarewave	50 Ω BNC Connector on rear panel
Level	0 - 5V (open circuit) 0 - 2.7 V (50 Ω)	TTL Compatible
Frequency	10, 5, 2, 1, 0.1 MHz, and 1 pps	1 pps = 1 pulse per second (1 Hz)
Risetime	< 50 ns	At 1 MHz
Slave Output (1)		
Output Waveform	Sinewave @ > -5 dBm	50 Ω BNC Connector on rear panel
Phase Noise (Typical)		
At 1 / 10 / 100 / 10k Hz Offset	-100 / -126 / -141 / -151 dBc/Hz	Lower phase noise option available
General		
Power (AC)	100 - 240 VAC	25 Watts max
Power (DC)	11-13 VDC @ 1.4 Amps	
Size and weight	483 x 300 x 44 mm and 4.6 kg	Width x Depth x Height
Ambient Operating Temperature	-10°C to +50 °C	
Options		
Option 01	Dual changeover alarm relay contacts	Plus two 8V logic alarm outputs
Option 02	Redundancy	Requires two units
Option 03	Internal Backup 10 MHz oscillator	Activated if input signal/power is lost
Option 04	Convert five outputs to 5 MHz	Remaining 5 outputs remain 10 MHz
Option 06	Second "back-up" 10 MHz input	Automatically switched in
Precision Test System Contact Details		
Precision Test Systems LTD 40 Holkham Avenue, South Woodham Ferrers Essex, CM3 7AU, England Tel: +44 (0) 845 052 0920 Fax: +44 (0) 1245 330030 Email: uksales@ptsyst.com Web: www.ptsyst.com	Precision Test Systems cc P.O Box 1344 Witkoppen, 2068 Gauteng South Africa Fax: 08651 58198 Email: sasales@ptsyst.com Web: www.ptsyst.com	Precision Test Systems 14781 Memorial Drive, Suite # 981 Houston Texas, 77079, USA Tel: 1 888 876 4804 Fax: 1 760 923 6354 Email: usasales@ptsyst.com Web: www.ptsyst.com

Full specifications available from www.ptsyst.com. Specifications and features subject to change without notice (020908)